Please check the examination details below before entering your candidate information

Candidate surname	Other names
StemUp Model Solution	

Centre Number | Candidate Number

Pearson Edexcel Level 3 GCE

Tuesday 17 June 2025

Morning (Time: 2 hours 30 minutes)

Paper reference **9PH0/03**

Physics

Advanced

PAPER 3: General and Practical Principles in Physics

You must have:
Scientific calculator and ruler
Data, Formulae and Relationships Booklet (enclosed)

Total Marks

Instructions

- Use **black** ink or ball-point pen.
- If pencil is used for diagrams/sketches/graphs it must be dark (HB or B).
- **Fill in the boxes** at the top of this page with your name, centre number and candidate number.
- Answer **all** questions.
- Answer the questions in the spaces provided
  – *there may be more space than you need.*

Information

- The total mark for this paper is 120.
- The marks for **each** question are shown in brackets
  – *use this as a guide as to how much time to spend on each question.*
- In questions marked with an **asterisk** (*), marks will be awarded for your ability to structure your answer logically, showing how the points that you make are related or follow on from each other where appropriate.

Advice

- Read each question carefully before you start to answer it.
- Try to answer every question.
- Check your answers if you have time at the end.
- You are advised to show your working in calculations including units where appropriate.

Turn over ▶

P78522A

©2025 Pearson Education Ltd.
Y:1/1/1/1/1/1/


P 7 8 5 2 2 A 0 1 3 2

Pearson

Answer ALL questions in the spaces provided.

1 A student investigated the variation of current with applied potential difference (p.d.) for a filament bulb. Under normal working conditions the potential difference across the bulb is 3.0 V.

(a) The circuit diagram shows the circuit the student used.

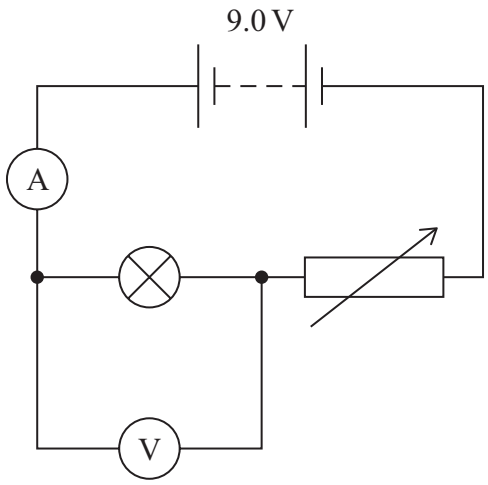

Comment on the suitability of the student's circuit.

(3)

The ammeter is in series and the voltmeter in parallel with the bulb, so valid measurements of current and p.d. are made, and adjusting the variable resistor will vary the current and p.d.

However, the circuit cannot give a full range of applied p.d.s, as the p.d. across the bulb cannot be reduced to zero.

Also, reducing the variable resistance will place a p.d. much larger than 3.0 V (up to 9.0 V) across the bulb, which could damage it.

So the circuit is not suitable: a potential divider arrangement should be used.

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

(b) When the p.d. across the bulb was 3.0 V, the student recorded a value of 1.29 A for the current.

In his conclusion he stated

> This will give an accurate value for the working resistance, as the value of current is precise.

Assess the validity of the student's statement. You do not need to carry out a calculation.

(4)

Precision is the closeness of agreement (consistency) between repeated measurements.

As the student has only taken a single value of current, he cannot say that the current is precise.

Accuracy is how close a measured value is to the true value.

The true value is not known, and there may be a systematic error (e.g. a zero error on the ammeter), so he cannot say that the value will be accurate. The statement is not valid.


(Total for Question 1 = 7 marks)

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

2 A transmitter produces microwaves with a frequency of 10.7 GHz. The microwaves are directed towards a metal plate. A microwave receiver R is placed between the transmitter and the metal plate, as shown.

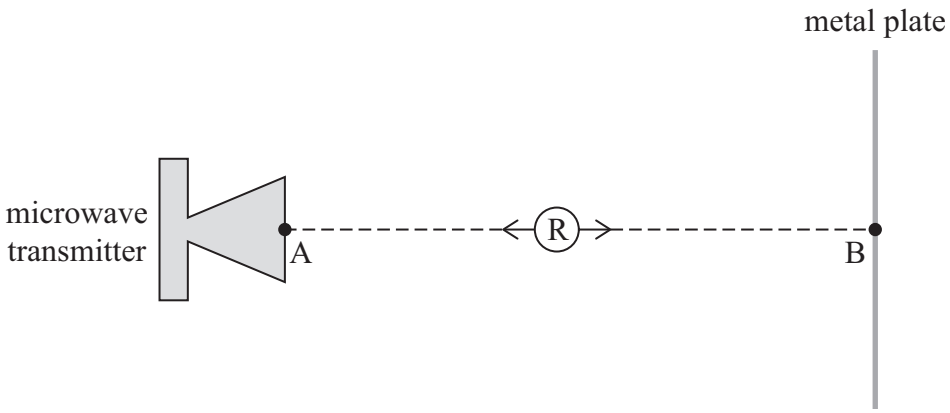

When R is moved along the line AB, the intensity of microwaves received is observed to increase from minimum to maximum a number of times. The distance between successive minima is about 1.5 cm.

Explain these observations. Your answer should include a calculation.

The microwaves are reflected from the metal plate, so the reflected waves superpose (interfere) with the incident waves and a standing wave is produced.

A maximum intensity is received where the waves arrive in phase (antinode), and a minimum where the waves arrive in antiphase (node).

$v = f\lambda$ so $\lambda = v/f = 3.00 \times 10^8$ m s^{-1} $\div$ 10.7×10^9 Hz $= 0.028$ m $= 2.8$ cm

The separation of successive minima (nodes) is $\lambda/2 = 2.8$ cm $\div 2 = 1.4$ cm, which is about 1.5 cm, as observed.

(Total for Question 2 = 5 marks)

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA


DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA


DO NOT WRITE IN THIS AREA

BLANK PAGE

3 A student uses a digital balance. She sets the balance to zero and then places a prism on the balance, as shown.

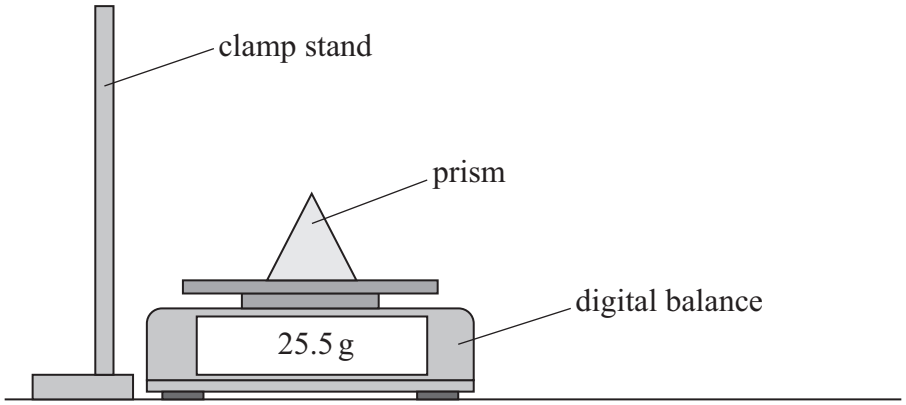

A uniform metre rule is pivoted at its 5.0 cm mark. The metre rule is then supported horizontally at the 30.0 cm mark by the prism, as shown below.

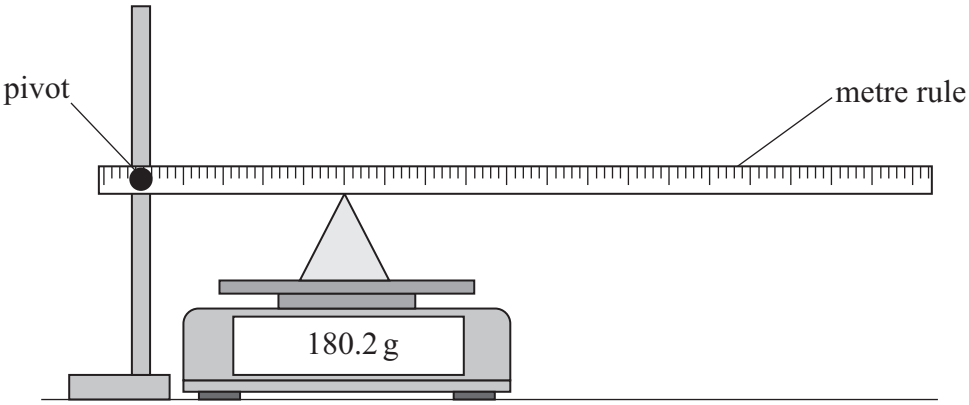

(a) (i) The metre rule is in equilibrium.

Explain why the increase in mass recorded by the balance is not equal to the mass of the metre rule.

(2)

The prism is not at the centre of gravity of the rule: the prism (30.0 cm mark) and the centre of gravity (50.0 cm mark) are at different distances from the pivot. So for the moments about the pivot to balance, the upward force from the prism must be larger than the weight of the rule.

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

(ii) Calculate the weight of the metre rule. You should take moments about the pivot.

(4)

Force at prism $F = mg = (0.1802\ kg - 0.0255\ kg) \times 9.81\ N\ kg^{-1} = 1.52\ N$

Moment = Fx. Principle of moments about the pivot: clockwise moment = anticlockwise moment

$W \times (50.0 - 5.0)\ cm = 1.52\ N \times (30.0 - 5.0)\ cm$

$W = 1.52\ N \times 25.0\ cm \div 45.0\ cm = 0.843\ N$

Weight of metre rule = 0.84 N

(b) The student wants to reduce the percentage uncertainty in the value obtained for the weight of the metre rule.

The student repeated her determination of the weight of the metre rule. She moved the prism towards the centre of gravity of the metre rule before taking moments about the pivot.

Deduce whether the percentage uncertainty in the value obtained for the weight of the metre rule is reduced by the student moving the prism. No calculations are required.

(3)

Moving the prism towards the centre of gravity increases the distance from the prism to the pivot, so the percentage uncertainty in this distance decreases.

However, the force at the prism (the balance reading) decreases, so the percentage uncertainty in the force (mass reading) increases.

As one percentage uncertainty decreases and the other increases, we cannot be sure whether the percentage uncertainty in the weight is reduced.


(Total for Question 3 = 9 marks)

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA


4 Two students, A and B, used a cobalt-60 source to investigate the inverse square law for a gamma radiation source. Cobalt-60 is a pure gamma emitter.

(a) The cobalt-60 source was placed in a source holder. A Geiger-Müller (GM) tube was connected to a counter and placed a short distance *d* away.

(i) Student A set up the apparatus as shown.

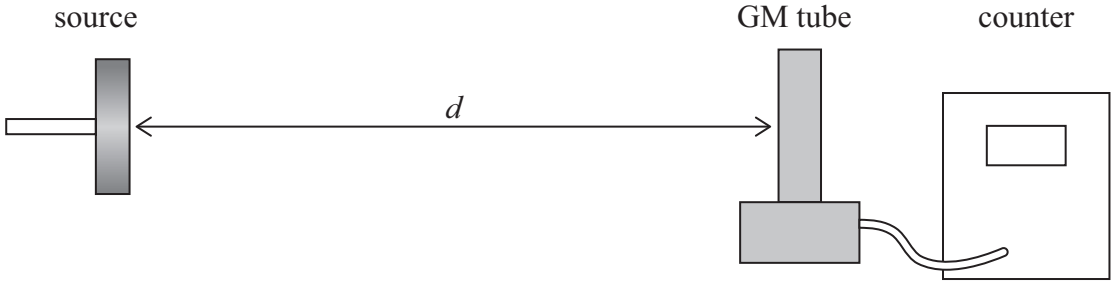

Student B used the same distance *d* but rotated the GM tube by 90°, as shown below.

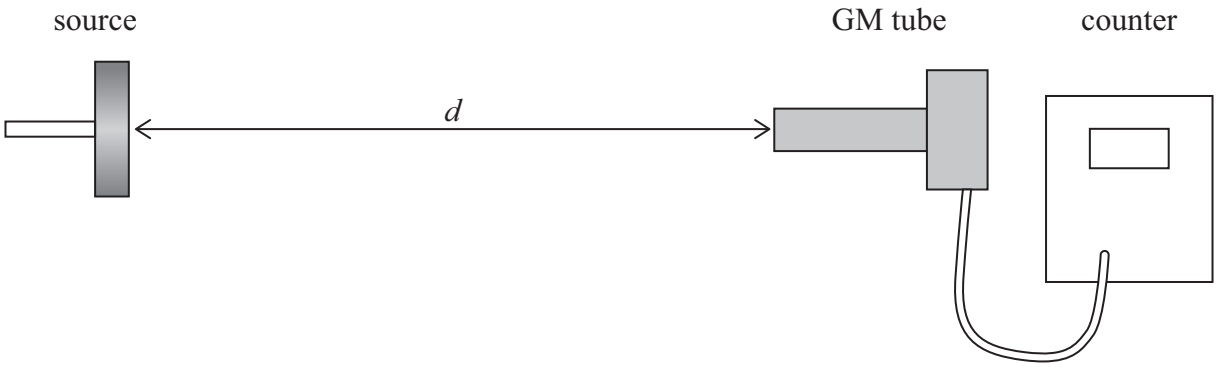

Both students recorded the count for 2 minutes.

Deduce which set-up will lead to a smaller percentage uncertainty in the count rate.

(3)

In Student A's set-up the end window of the GM tube faces the source, so the area of the detector exposed to the γ-radiation is larger.

So the count (count rate) will be greater at the same distance from the source.

The percentage uncertainty in a count decreases as the count increases, so Student A's set-up gives the smaller percentage uncertainty.

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

(ii) Explain two modifications to the experimental method which would improve the accuracy of the data.

(4)

Record the background count (rate) with the source removed and subtract it from each recorded count (rate).

This gives the count rate from the source only, as the background count adds to the count from the source (a systematic error).

Record the count for a longer time (e.g. 10 minutes) at each distance, or repeat the count and calculate a mean.

This increases the total count recorded, which reduces the effect of the random nature of radioactive decay.

(b) Student A suggests that the investigation into the inverse square law for a gamma radiation source could be carried out successfully using a radium-226 source.

Radium-226 emits alpha and beta radiation as well as gamma radiation.

Explain **one** modification that would be necessary if a radium-226 source were to be used.

(2)

Place an aluminium sheet (a few mm thick) between the source and the GM tube.

This will absorb the alpha and beta radiation emitted by the source, so only gamma radiation reaches the detector.

(Total for Question 4 = 9 marks)

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

5 Fuse wire is made of a metal that has a low melting point. The wire melts when the current exceeds a maximum value.

A student investigated how the cross-sectional area affected the current at which a wire melted. She used wires of the same length and metal, but different diameters.

The student steadily increased the current through each wire and recorded the maximum current through the wire before it melted.

(a) Describe how the student could determine an accurate value for the cross-sectional area of a wire.

(4)

Use a micrometer screw gauge to measure the diameter of the wire.

Check for (and correct) any zero error, and use the ratchet on the micrometer so the wire is not squashed.

Measure the diameter at several different positions along the wire, and at different orientations, and calculate a mean.

Calculate the cross-sectional area using $A = \pi d^2/4$.

(b) (i) Explain why a current in a wire causes the resistance of the wire to change.

(3)

The current causes the temperature of the wire to increase, as the electrons collide with the lattice ions and transfer energy to them.

So the amplitude of vibration of the lattice ions increases.

The electrons make more frequent collisions with the lattice ions, so the resistance of the wire increases.

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

(ii) The length of a wire does not affect the value of current at which the wire melts.

Explain why. Assume the wire behaves as a black body.

(2)

Stefan-Boltzmann law, $L = \sigma AT^4$: the rate of energy transfer from the wire is determined by its surface area.

A longer wire has a larger surface area, so more energy is radiated away (as well as more being dissipated) and the temperature does not change.

(Total for Question 5 = 9 marks)

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

***6** Air at room temperature was sealed in a closed container. The container was placed in an ice bath and the temperature of the air decreased. The volume of the container remained constant.

Explain what happened to the pressure exerted by the air. In your response you should refer to the momentum of the air molecules.

When the temperature of the air decreases, the average kinetic energy of the air molecules decreases.

So the mean square speed of the molecules decreases, and so the momentum of each molecule decreases.

Therefore the momentum change in each collision of a molecule with the container walls decreases.

Also, as the molecules move more slowly, the rate of collisions with the container walls decreases.

So the rate of change of momentum of the molecules at the walls decreases.

By Newton's second law, $F = \Delta p/\Delta t$, so the force exerted by the molecules on the container walls decreases.

Since $p = F/A$ and the area of the walls is constant, the pressure exerted by the air decreases.

(Total for Question 6 = 6 marks)

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA


DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA


BLANK PAGE

7 A student has 10 identical flat metal discs. One of the discs is shown. Each disc has a diameter d of about 5 cm and a thickness t of about 2 mm.

View of disc from above

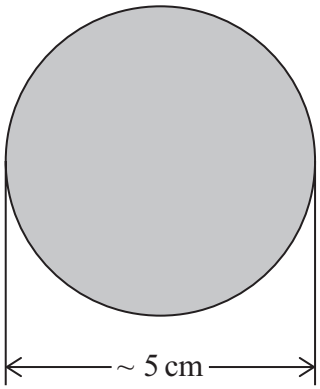

Side view of disc



The student determined the density of the metal the discs are made from.

She used a half-metre rule to measure d for one of the discs. She used vernier calipers to measure t for one of the discs.

The student then repeated this process for two more discs and calculated average values for d and t of the discs.

(a) Describe improvements to the student's method that would give more accurate values for d and t of the discs.

(4)

Measure the total thickness of a number of discs (e.g. all 10) stacked together using vernier calipers.

Divide by the number of discs in the stack to determine the average thickness t of one disc.

Line up a number of discs (e.g. all 10) edge to edge in a straight line and measure their total length.

Divide by the number of discs to determine the average diameter d of one disc. This increases the distance measured, so the percentage uncertainty is reduced.

Or measure the diameter of a number of discs using vernier calipers (not the half-metre rule), at different orientations, and calculate a mean.

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

(b) The student determined the average mass of a disc to be 42.5 g ± 0.5 g.

Calculate the density of the material the discs are made from and the percentage uncertainty in this value.

average diameter of disc = 5.2 cm ± 0.1 cm
average thickness of disc = 1.9 mm ± 0.1 mm

(6)

$V = \pi r^2 t = \pi \times (5.2 \times 10^{-2}\ m \div 2)^2 \times 1.9 \times 10^{-3}\ m = 4.04 \times 10^{-6}\ m^3$

$\rho = m/V = 42.5 \times 10^{-3}\ kg \div 4.04 \times 10^{-6}\ m^3 = 1.05 \times 10^4\ kg\ m^{-3}$

% U in mass = 0.5 g ÷ 42.5 g × 100 % = 1.2 %

% U in diameter = 0.1 cm ÷ 5.2 cm × 100 % = 1.9 %

% U in thickness = 0.1 mm ÷ 1.9 mm × 100 % = 5.3 %

% U in ρ = 1.2 % + (2 × 1.9 %) + 5.3 % = 10.3 %

Density = $1.1 \times 10^4\ kg\ m^{-3}$

Percentage uncertainty = 10 %

(Total for Question 7 = 10 marks)

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA


BLANK PAGE

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

8 An object moving through a fluid experiences a drag force due to the viscosity of the fluid.

(a) Some liquid chocolate is poured into a mould. Within the chocolate a bubble of air is formed. The bubble has negligible weight and moves upwards at a constant speed, as shown.

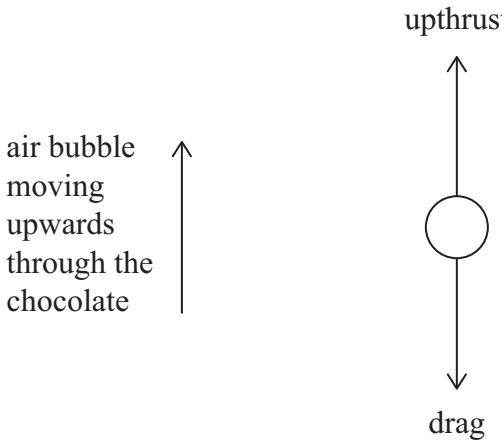

Calculate the constant speed at which the air bubble moves upwards in the liquid chocolate.

radius of air bubble = 6.8×10^{-3} m
density of liquid chocolate = $925\,\text{kg}\,\text{m}^{-3}$
viscosity of liquid chocolate = 52.6 Pa s

(5)

$V = 4/3\ \pi r^3 = 4/3 \times \pi \times (6.8 \times 10^{-3}\ m)^3 = 1.32 \times 10^{-6}\ m^3$

Mass of chocolate displaced $m = \rho V = 925\ kg\ m^{-3} \times 1.32 \times 10^{-6}\ m^3 = 1.22 \times 10^{-3}$ kg

Upthrust = weight of chocolate displaced = $mg = 1.22 \times 10^{-3}\ kg \times 9.81\ N\ kg^{-1} = 1.20 \times 10^{-2}\ N$

Constant speed, so drag = upthrust: $F = 6\pi\eta rv$

$v = 1.20 \times 10^{-2}\ N \div (6\pi \times 52.6\ Pa\ s \times 6.8 \times 10^{-3}\ m) = 1.77 \times 10^{-3}\ m\ s^{-1}$

Speed air bubble moves upwards = $1.8 \times 10^{-3}\ m\ s^{-1}$

(b) The viscosity of a gas increases with temperature.

(i) It is suggested that the relationship between viscosity η and temperature T is of the form

$$\eta = AT^B$$

where A and B are constants.

Explain why a graph of log η against log T would give a straight line.

(2)

Taking logs: log η = log A + B log T

Compare with y = c + mx: a graph of log η against log T is a straight line with gradient B (a constant) and intercept log A.

(ii) The table shows data for the viscosity of hydrogen gas over a range of temperatures.

T/K	η/mPa s	log (T / K)	log (η / mPa s)
123	4.60	2.090	0.663
173	6.00	2.238	0.778
273	8.30	2.436	0.919
373	10.4	2.572	1.017
473	12.0	2.675	1.079

Plot a graph of log η against log T. You should use the columns provided to show any processed data.


(5)

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

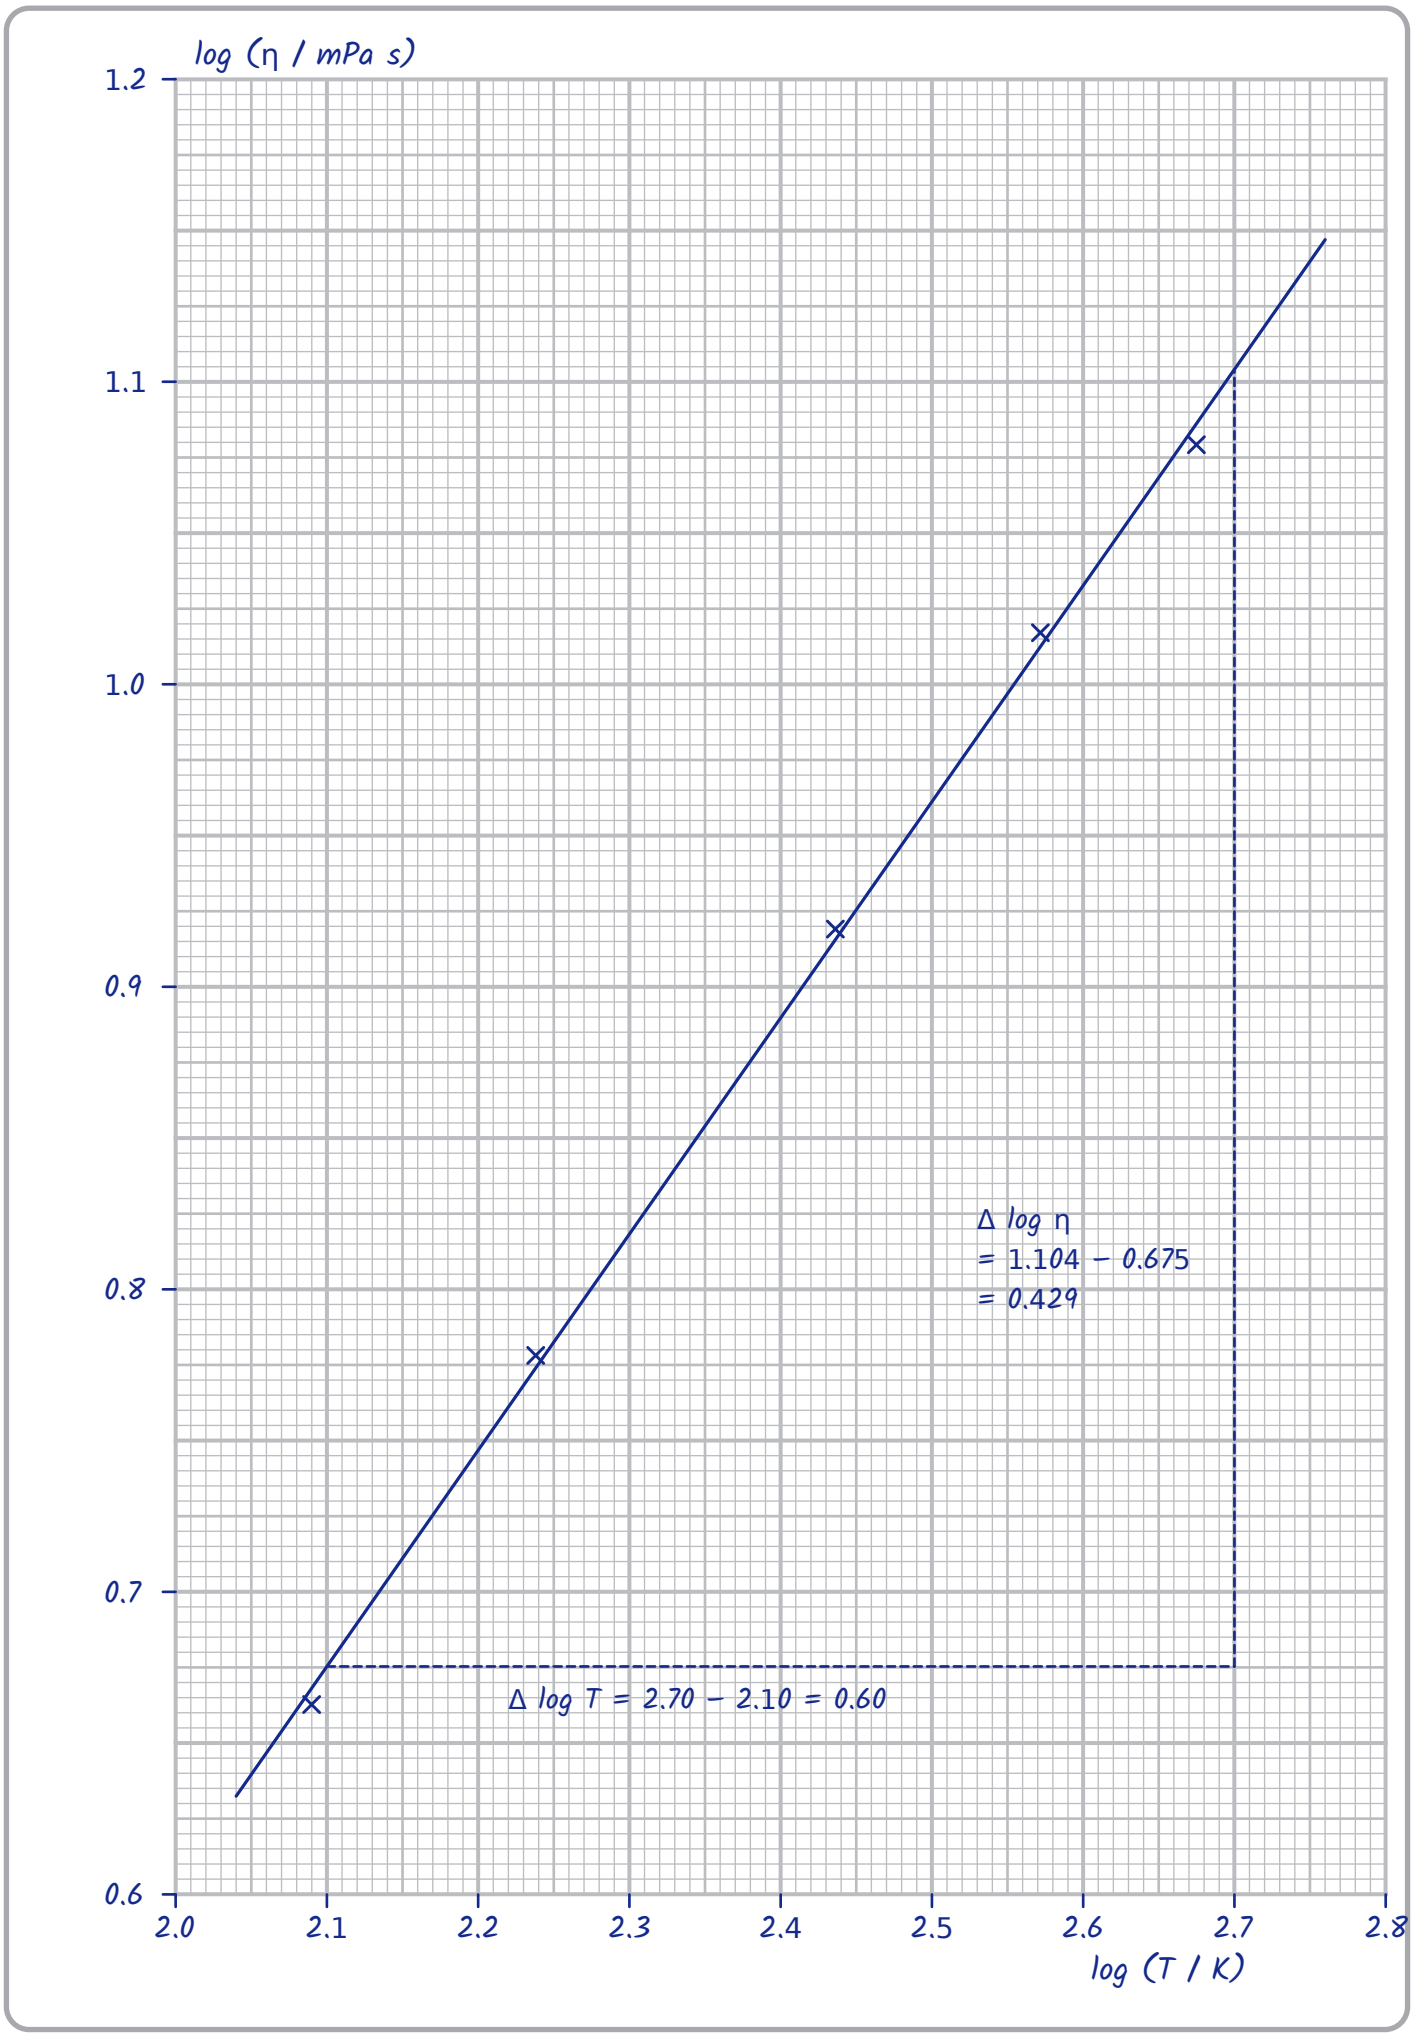

(iii) Determine values for A and B. You are not required to state the units of A.

(4)

Gradient (large triangle) = (1.104 − 0.675) ÷ (2.70 − 2.10) = 0.429 ÷ 0.60 = 0.715

B = gradient = 0.715

log A = log η − B log T = 1.104 − (0.715 × 2.70) = −0.827

$A = 10^{-0.827} = 0.149$

$A =$ 0.15

$B =$ 0.72

(Total for Question 8 = 16 marks)


DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

9 A cantilever is a beam fixed at one end.

A student made a cantilever by clamping a metre rule to a bench and attached a mass M at the free end, as shown.

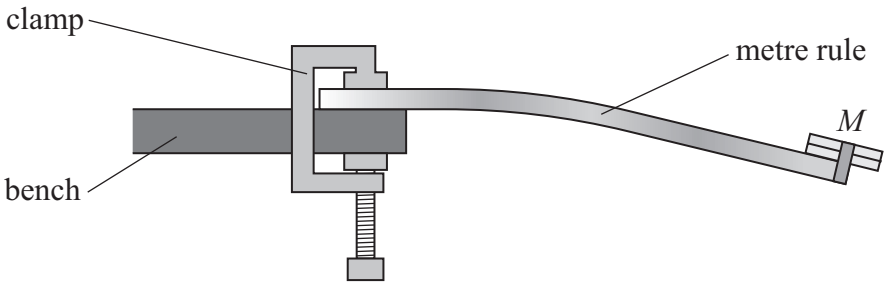

The student displaced the free end through a small distance. When the free end was released, the cantilever oscillated with simple harmonic motion of period T.

(a) The student measured the time for 5 oscillations with an electronic stopwatch. This was repeated twice.

(i) Explain **one** modification to the apparatus which would improve the accuracy of the data the student obtained.

(3)

Use a fiducial marker, e.g. a vertical pin held in a clamp stand.

Place it at the equilibrium position of the end of the cantilever, and start and stop timing as the end passes the marker.

The end of the cantilever is moving fastest at the equilibrium position, so the instant it passes is easiest to judge and timing errors are reduced.

(ii) Explain **one** modification to the student's method which would reduce the percentage uncertainty in her measurement of T.

(2)

Time a larger number of oscillations, e.g. 20 oscillations instead of 5, and divide by the number of oscillations.

This increases the total time recorded, so the percentage uncertainty in T is reduced (the reaction time uncertainty stays the same).

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

(b) The length of the metre rule overhanging the bench was L. The period of oscillation T is related to L, M and the Young modulus E of the wood of the metre rule by the expression

$$T^2 \propto \frac{ML^3}{E}$$

The student repeated the timing measurements for a half-metre rule.

The half-metre rule had the same added mass M, width and thickness as the metre rule.

The metre rule was made from wood of Young modulus E_1, and the half-metre rule was made from wood of Young modulus E_2.

The student collected the following data.

			Time for 5 oscillations		
	Young modulus	L / **m**	t_1 / **s**	t_2 / **s**	t_3 / **s**
Metre rule	E_1	0.95	14.69	14.64	14.76
Half-metre rule	E_2	0.45	5.33	5.40	5.24

The table below gives the Young modulus values of various types of wood.

Type of wood	**Cedar**	**Spruce**	**Pine**
Young modulus / GPa	7.7	9.6	10.1

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

Deduce the type of wood each rule is made from.

(6)

$T_1 = (14.69 + 14.64 + 14.76)\ s \div 3 \div 5 = 2.94\ s$

$T_2 = (5.33 + 5.40 + 5.24)\ s \div 3 \div 5 = 1.06\ s$

$T^2 \propto ML^3/E$, and M, width and thickness are the same, so $E \propto L^3/T^2$

$E_1/E_2 = (L_1/L_2)^3 \times (T_2/T_1)^2 = (0.95\ m \div 0.45\ m)^3 \times (1.06\ s \div 2.94\ s)^2 = 1.22$

From the table: $E_{spruce}/E_{cedar} = 9.6\ GPa \div 7.7\ GPa = 1.25$, $E_{pine}/E_{spruce} = 10.1 \div 9.6 = 1.05$, $E_{pine}/E_{cedar} = 10.1 \div 7.7 = 1.31$

1.22 is closest to 1.25, so the metre rule is made from spruce and the half-metre rule is made from cedar.

(Total for Question 9 = 11 marks)

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

10 The potential difference (p.d.) from a power pack alternates at a frequency of 50 Hz. The root-mean-square (r.m.s.) value of the output p.d. is measured to be 8.5 V using an a.c. voltmeter.

The output from the power pack is connected to a resistor of resistance 1.5 Ω.

(a) Show that the rate of power dissipation in the resistor is about 48 W.

(2)

$P = V^2/R$ using the r.m.s. p.d.: $P = (8.5\ V)^2 \div 1.5\ \Omega$

$P = 48.2\ W$, which is about $48\ W$

(b) A lab technician used the resistor to heat $1.25 \times 10^{-4}\ m^3$ of milk in a beaker.

Calculate the time taken for the milk to increase in temperature by 12 °C.

specific heat capacity of milk = $3930\ J\,kg^{-1}\,K^{-1}$
density of milk = $1050\ kg\,m^{-3}$

(4)

$m = \rho V = 1050\ kg\ m^{-3} \times 1.25 \times 10^{-4}\ m^3 = 0.131\ kg$

$\Delta E = mc\Delta\theta = 0.131\ kg \times 3930\ J\ kg^{-1}\ K^{-1} \times 12\ K = 6.19 \times 10^3\ J$

$P = \Delta W/\Delta t$ so $t = 6.19 \times 10^3\ J \div 48.2\ W = 128\ s$

Time = 128 s

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

(c) The lab technician used an oscilloscope to determine the supply frequency and check the r.m.s. output p.d. displayed by the voltmeter.

Describe the methods the technician should use.

(6)

Connect the oscilloscope across the output and adjust the time base so that a complete wave (or several cycles) can be seen on the screen.

Measure the horizontal distance (in divisions) from one peak to the next peak, or across several cycles.

Multiply this distance by the time base setting (s div^{-1}) to find the time for one cycle, T.

Use $f = 1/T$ to calculate the supply frequency (expected 50 Hz).

Measure the amplitude (height of a peak above the centre line, in divisions) and multiply by the voltage sensitivity (V div^{-1}) to find the peak p.d. V_0.

Use $V_{rms} = V_0/\sqrt{2}$ to calculate the r.m.s. p.d. and compare it with the voltmeter reading of 8.5 V.

(Total for Question 10 = 12 marks)

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

11 Particle accelerators produce beams of high speed charged particles which are used to investigate particle collisions. New particles are created during the collisions.

(a) In the Large Hadron Collider (LHC), protons are maintained in a circular path by the force exerted on the protons due to a magnetic field.

(i) The magnetic flux density required to maintain the protons in a circular path increases as the kinetic energy of the protons increases.

Explain why.

(2)

As the kinetic energy of the protons increases, their velocity and momentum increase.

$r = p/BQ$ (from $Bqv = mv^2/r$), so to keep the radius r constant as p increases, the magnetic flux density B must increase.

(ii) Calculate the magnetic flux density required to maintain the protons in the LHC when the protons are travelling at a speed of $3.0 \times 10^7\,m\,s^{-1}$.

circumference of LHC = 27 km

(4)

$r = \text{circumference} \div 2\pi = 27 \times 10^3\ m \div 2\pi = 4.30 \times 10^3\ m$

$F = mv^2/r = 1.67 \times 10^{-27}\ kg \times (3.0 \times 10^7\ m\ s^{-1})^2 \div 4.30 \times 10^3\ m = 3.50 \times 10^{-16}\ N$

$F = Bqv$ so $B = F/qv = 3.50 \times 10^{-16}\ N \div (1.60 \times 10^{-19}\ C \times 3.0 \times 10^7\ m\ s^{-1})$

$B = 7.28 \times 10^{-5}\ T$

Magnetic flux density = $7.3 \times 10^{-5}\ T$

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA

(iii) A maximum of 13 600 GeV of energy is available to create a new particle.

Calculate the theoretical maximum mass, in kg, of the new particle.

(3)

$E = 13\ 600 \times 10^9\ eV \times 1.60 \times 10^{-19}\ J\ eV^{-1} = 2.18 \times 10^{-6}\ J$

$\Delta E = c^2 \Delta m$; $m = 2.18 \times 10^{-6}\ J \div (3.00 \times 10^8\ m\ s^{-1})^2 = 2.42 \times 10^{-23}\ kg$

Maximum mass = 2.4×10^{-23} kg

*(b) Fifty years ago, fixed-target collision experiments were carried out at the Stanford Linear Accelerator Centre (SLAC). In these experiments, high speed particles were made to collide with a stationary target.

Currently, colliding beam experiments are carried out at SLAC. In these experiments, high speed particles travelling in opposite directions are made to collide head-on.

For a given total energy in the collision, colliding beam experiments allow particles to be created with a larger mass than could be created in a fixed-target experiment.

Explain why colliding beam experiments allow a new particle with the larger mass to be created. You should consider how the conservation of energy and the conservation of momentum apply to each type of collision.

(6)

In a fixed-target experiment the target is stationary but the incoming particle has momentum, so there is momentum before the collision.

By conservation of momentum there must be the same momentum after the collision.

So the particle(s) created must be moving, and must have some kinetic energy.

So not all of the kinetic energy can be converted into the mass of a new particle.

In a colliding beam experiment the particles have the same mass and speed but travel in opposite directions, so the total initial momentum is zero.


So the momentum after the collision will be zero, and the new particle can be created at rest.

So (almost) all of the kinetic energy is converted to mass, and a particle with a larger mass can be created for the same total energy.

(Total for Question 11 = 15 marks)

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

12 In an experiment to determine the acceleration of free-fall, g, a metal cylinder was dropped from rest down a glass tube. A light gate was positioned close to the outside of the glass tube, as shown.

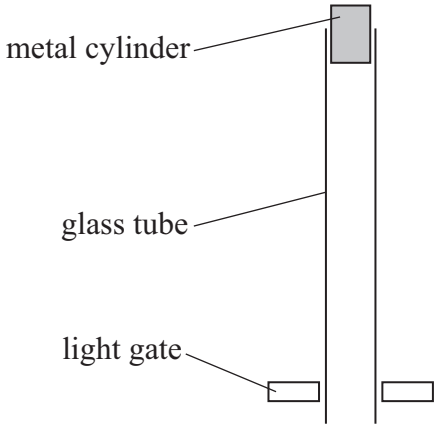

The light gate was connected to a data logger that recorded the time t taken for the cylinder to pass the gate.

(a) A student recorded the following data.

t_1 / ms	t_2 / ms	t_3 / ms	t_4 / ms
7.85	7.81	7.79	7.80

(i) The student omitted t_1 when calculating the mean time. He justified this by stating that t_1 is an anomalous result.

Another student stated that the correct mean time should use all the data in the table.

Explain who is correct.

(2)

t_1 is not significantly different from the other times: it is only 0.6 % greater than the mean of the other times, and there is not enough data to show that t_1 is anomalous.

So the student who says that all the data should be used is correct.

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

(ii) Calculate the percentage uncertainty in the mean time t_{mean}.

(3)

t_{mean} = (7.85 + 7.81 + 7.79 + 7.80) ms ÷ 4 = 7.81 ms

Uncertainty = half range = (7.85 − 7.79) ms ÷ 2 = 0.03 ms

% U = 0.03 ms ÷ 7.81 ms × 100 % = 0.38 %

Percentage uncertainty in t_{mean} = 0.4 %

(iii) The student used the mean time to calculate the velocity of the metal cylinder as it moved past the light gate.

State the extra measurement the student must have made to calculate this velocity.

(1)

The length (height) of the metal cylinder, e.g. measured with vernier calipers.

(b) The metal cylinder fell through a distance 0.75 m before reaching the light gate.

(i) Calculate the velocity of the metal cylinder as it reached the light gate.

(2)

$v^2 = u^2 + 2as$ with $u = 0$

$v = \sqrt{(2 \times 9.81\ m\ s^{-2} \times 0.75\ m)} = 3.84\ m\ s^{-1}$

Velocity = 3.8 m s^{-1}

(ii) Explain why a light gate and data logger were used in this experiment rather than a stopwatch. You should refer to your answer to (b)(i).

(3)

The cylinder is travelling very quickly (3.8 m s^{-1}) when it reaches the light gate.

So the time taken for the cylinder to pass through the light gate is very short (about 8 ms).

It would be impossible to start and stop a stopwatch in such a short time, as human reaction time (about 0.2 s) is much longer; the light gate and data logger have no reaction time error.

(Total for Question 12 = 11 marks)

TOTAL FOR PAPER = 120 MARKS

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

BLANK PAGE

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

BLANK PAGE

BLANK PAGE

DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA
DO NOT WRITE IN THIS AREA

Pearson Edexcel Level 3 GCE

Tuesday 17 June 2025

Morning (Time: 2 hours 30 minutes)

Paper reference **9PH0/03**

Physics

Advanced

PAPER 3: General and Practical Principles in Physics

Data, Formulae and Relationships Booklet
Do not return this Booklet with the question paper.

Turn over ▶

P78522A

©2025 Pearson Education Ltd.
Y:1/1/1/1/1/1/

P 7 8 5 2 2 A

Pearson

List of data, formulae and relationships

Acceleration of free fall	$g = 9.81\ \text{m s}^{-2}$	(close to Earth's surface)
Boltzmann constant	$k = 1.38 \times 10^{-23}\ \text{J K}^{-1}$	
Coulomb law constant	$k = \frac{1}{4\pi\varepsilon_0} = 8.99 \times 10^{9}\ \text{N m}^2\ \text{C}^{-2}$	
Electron charge	$e = -1.60 \times 10^{-19}\ \text{C}$	
Electron mass	$m_e = 9.11 \times 10^{-31}\ \text{kg}$	
Electronvolt	$1\ \text{eV} = 1.60 \times 10^{-19}\ \text{J}$	
Gravitational constant	$G = 6.67 \times 10^{-11}\ \text{N m}^2\ \text{kg}^{-2}$	
Gravitational field strength	$g = 9.81\ \text{N kg}^{-1}$	(close to Earth's surface)
Permittivity of free space	$\varepsilon_0 = 8.85 \times 10^{-12}\ \text{F m}^{-1}$	
Planck constant	$h = 6.63 \times 10^{-34}\ \text{J s}$	
Proton mass	$m_p = 1.67 \times 10^{-27}\ \text{kg}$	
Speed of light in a vacuum	$c = 3.00 \times 10^{8}\ \text{m s}^{-1}$	
Stefan-Boltzmann constant	$\sigma = 5.67 \times 10^{-8}\ \text{W m}^{-2}\ \text{K}^{-4}$	
Unified atomic mass unit	$u = 1.66 \times 10^{-27}\ \text{kg}$	

Mechanics

Kinematic equations of motion

$$s = \frac{(u + v)t}{2}$$

$$v = u + at$$

$$s = ut + \tfrac{1}{2}at^2$$

$$v^2 = u^2 + 2as$$

Forces

$$\Sigma F = ma$$

$$g = \frac{F}{m}$$

$$W = mg$$

moment of force $= Fx$

Momentum

$$p = mv$$

Work, energy and power

$$\Delta W = F\Delta s$$

$$E_k = \tfrac{1}{2}mv^2$$

$$\Delta E_{grav} = mg\Delta h$$

$$P = \frac{E}{t}$$

$$P = \frac{W}{t}$$

$$\text{efficiency} = \frac{\text{useful energy output}}{\text{total energy input}}$$

$$\text{efficiency} = \frac{\text{useful power output}}{\text{total power input}}$$

Electric circuits

Potential difference

$$V = \frac{W}{Q}$$

Resistance

$$R = \frac{V}{I}$$

Electrical power and energy

$$P = VI$$

$$P = I^2R$$

$$P = \frac{V^2}{R}$$

$$W = VIt$$

Resistivity

$$R = \frac{\rho l}{A}$$

Current

$$I = \frac{\Delta Q}{\Delta t}$$

$$I = nqvA$$

Materials

Density

$$\rho = \frac{m}{V}$$

Stokes' law

$$F = 6\pi\eta rv$$

Hooke's law

$$\Delta F = k\Delta x$$

Young modulus

$$\text{Stress } \sigma = \frac{F}{A}$$

$$\text{Strain } \varepsilon = \frac{\Delta x}{x}$$

$$E = \frac{\sigma}{\varepsilon}$$

Elastic strain energy

$$\Delta E_{\text{el}} = \tfrac{1}{2}F\Delta x$$

Waves and particle nature of light

Wave speed

$$v = f\lambda$$

Speed of a transverse wave on a string

$$v = \sqrt{\frac{T}{\mu}}$$

Intensity of radiation

$$I = \frac{P}{A}$$

Power of a lens

$$P = \frac{1}{f}$$

$$P = P_1 + P_2 + P_3 + \ldots$$

Thin lens equation

$$\frac{1}{u} + \frac{1}{v} = \frac{1}{f}$$

Magnification for a lens

$$m = \frac{\text{image height}}{\text{object height}} = \frac{v}{u}$$

Diffraction grating

$$n\lambda = d \sin\theta$$

Refractive index

$$n_1 \sin\theta_1 = n_2 \sin\theta_2$$

$$n = \frac{c}{v}$$

Critical angle

$$\sin C = \frac{1}{n}$$

Photon model

$$E = hf$$

Einstein's photoelectric equation

$$hf = \phi + \tfrac{1}{2}mv^2{}_{\text{max}}$$

de Broglie wavelength

$$\lambda = \frac{h}{p}$$

Further mechanics

Impulse

$$F\Delta t = \Delta p$$

Kinetic energy of a non-relativistic particle

$$E_k = \frac{p^2}{2m}$$

Motion in a circle

$$v = \omega r$$

$$T = \frac{2\pi}{\omega}$$

$$F = ma = \frac{mv^2}{r}$$

$$a = \frac{v^2}{r}$$

$$a = r\omega^2$$

$$F = mr\omega^2$$

Fields

Coulomb's law

$$F = \frac{Q_1 Q_2}{4\pi\varepsilon_0 r^2}$$

Electric field strength

$$E = \frac{F}{Q}$$

$$E = \frac{Q}{4\pi\varepsilon_0 r^2}$$

$$E = \frac{V}{d}$$

Electric potential

$$V = \frac{Q}{4\pi\varepsilon_0 r}$$

Capacitance

$$C = \frac{Q}{V}$$

Energy stored in a capacitor

$$W = \tfrac{1}{2}QV$$

$$W = \tfrac{1}{2}CV^2$$

$$W = \tfrac{1}{2}\frac{Q^2}{C}$$

Capacitor discharge

$$Q = Q_0 e^{-t/RC}$$

$$I = I_0 e^{-t/RC}$$

$$V = V_0 e^{-t/RC}$$

$$\ln Q = \ln Q_0 - \frac{t}{RC}$$

$$\ln I = \ln I_0 - \frac{t}{RC}$$

$$\ln V = \ln V_0 - \frac{t}{RC}$$

In a magnetic field

$$F = BIl \sin\theta$$

$$F = Bqv \sin\theta$$

Faraday's and Lenz's laws

$$\mathscr{E} = \frac{-\mathrm{d}(N\phi)}{\mathrm{d}t}$$

Root-mean-square values

$$V_{rms} = \frac{V_0}{\sqrt{2}}$$

$$I_{rms} = \frac{I_0}{\sqrt{2}}$$

Nuclear and particle physics

In a magnetic field

$$r = \frac{p}{BQ}$$

Thermodynamics

Heating

$$\Delta E = mc\Delta\theta$$

$$\Delta E = L\Delta m$$

Molecular kinetic theory

$$\frac{1}{2}m\langle c^2\rangle = \frac{3}{2}kT$$

$$pV = \frac{1}{3}Nm\langle c^2\rangle$$

Ideal gas equation

$$pV = NkT$$

Stefan-Boltzmann law

$$L = \sigma AT^4$$

$$L = 4\pi r^2\sigma T^4$$

Wien's law

$$\lambda_{max}T = 2.898 \times 10^{-3}\ \text{m K}$$

Space

Intensity

$$I = \frac{L}{4\pi d^2}$$

Redshift of electromagnetic radiation

$$z = \frac{\Delta\lambda}{\lambda} \approx \frac{\Delta f}{f} \approx \frac{v}{c}$$

Cosmological expansion

$$v = H_0 d$$

Nuclear radiation

Mass-energy

$$\Delta E = c^2\Delta m$$

Radioactive decay

$$A = \lambda N$$

$$\frac{dN}{dt} = -\lambda N$$

$$\lambda = \frac{\ln 2}{t_{1/2}}$$

$$N = N_0\, e^{-\lambda t}$$

$$A = A_0\, e^{-\lambda t}$$

Gravitational fields

Gravitational force

$$F = \frac{Gm_1m_2}{r^2}$$

Gravitational field strength

$$g = \frac{Gm}{r^2}$$

Gravitational potential

$$V_{grav} = \frac{-Gm}{r}$$

Oscillations

Simple harmonic motion

$$F = -kx$$

$$a = -\omega^2 x$$

$$x = A\cos\omega t$$

$$v = -A\omega\sin\omega t$$

$$a = -A\omega^2\cos\omega t$$

$$T = \frac{1}{f} = \frac{2\pi}{\omega}$$

$$\omega = 2\pi f$$

Simple harmonic oscillator

$$T = 2\pi\sqrt{\frac{m}{k}}$$

$$T = 2\pi\sqrt{\frac{l}{g}}$$

END OF DATA, FORMULAE AND RELATIONSHIPS LIST

BLANK PAGE

BLANK PAGE

BLANK PAGE