

GCE

Physics A

Unit **H556/03**: Unified physics

Advanced GCE

Mark Scheme for June 2018

OCR (Oxford Cambridge and RSA) is a leading UK awarding body, providing a wide range of qualifications to meet the needs of candidates of all ages and abilities. OCR qualifications include AS/A Levels, Diplomas, GCSEs, Cambridge Nationals, Cambridge Technicals, Functional Skills, Key Skills, Entry Level qualifications, NVQs and vocational qualifications in areas such as IT, business, languages, teaching/training, administration and secretarial skills.

It is also responsible for developing new specifications to meet national requirements and the needs of students and teachers. OCR is a not-for-profit organisation; any surplus made is invested back into the establishment to help towards the development of qualifications and support, which keep pace with the changing needs of today's society.

This mark scheme is published as an aid to teachers and students, to indicate the requirements of the examination. It shows the basis on which marks were awarded by examiners. It does not indicate the details of the discussions which took place at an examiners' meeting before marking commenced.

All examiners are instructed that alternative correct answers and unexpected approaches in candidates' scripts must be given marks that fairly reflect the relevant knowledge and skills demonstrated.

Mark schemes should be read in conjunction with the published question papers and the report on the examination.

© OCR 2018

Annotation		Meaning
	Correct response	Used to indicate the point at which a mark has been awarded (one tick per mark awarded).
	Incorrect response	Used to indicate an incorrect answer or a point where a mark is lost.
AE	Arithmetic error	Do not allow the mark where the error occurs. Then follow through the working/calculation giving full subsequent ECF if there are no further errors.
BOD	Benefit of doubt given	Used to indicate a mark awarded where the candidate provides an answer that is not totally satisfactory, but the examiner feels that sufficient work has been done.
BP	Blank page	Use BP on additional page(s) to show that there is no additional work provided by the candidates.
CON	Contradiction	No mark can be awarded if the candidate contradicts himself or herself in the same response.
ECF	Error carried forward	Used in <u>numerical answers only</u> , unless specified otherwise in the mark scheme. Answers to later sections of numerical questions may be awarded up to full credit provided they are consistent with earlier incorrect answers. Within a question, ECF can be given for AE, TE and POT errors but not for XP.
L1	Level 1	L1 is used to show 2 marks awarded and L1 [^] is used to show 1 mark awarded.
L2	Level 2	L2 is used to show 4 marks awarded and L2 [^] is used to show 3 marks awarded.
L3	Level 3	L3 is used to show 6 marks awarded and L3 [^] is used to show 5 marks awarded.
POT	Power of 10 error	This is usually linked to conversion of SI prefixes. Do not allow the mark where the error occurs. Then follow through the working/calculation giving ECF for subsequent marks if there are no further errors.
SEEN	Seen	To indicate working/text has been seen by the examiner.
SF	Error in number of significant figures	Where more SFs are given than is justified by the question, do not penalise. Fewer significant figures than necessary will be considered within the mark scheme. Penalised only once in the paper.
TE	Transcription error	This error is when there is incorrect transcription of the correct data from the question, graphical read-off, formulae booklet or a previous answer. Do not allow the relevant mark and then follow through the working giving ECF for subsequent marks.
XP	Wrong physics or equation	Used in <u>numerical answers only</u> , unless otherwise specified in the mark scheme. Use of an incorrect equation is wrong physics even if it happens to lead to the correct answer.
^	Omission	Used to indicate where more is needed for a mark to be awarded (what is written is not wrong but not enough).

Abbreviations, annotations and conventions used in the detailed Mark Scheme (to include abbreviations and subject-specific conventions).

Annotation	Meaning
/	alternative and acceptable answers for the same marking point
Reject	Answers which are not worthy of credit
Not	Answers which are not worthy of credit
Ignore	Statements which are irrelevant
Allow	Answers that can be accepted
()	Words which are not essential to gain credit
<u> </u>	Underlined words must be present in answer to score a mark
ECF	Error carried forward
AW	Alternative wording
ORA	Or reverse argument

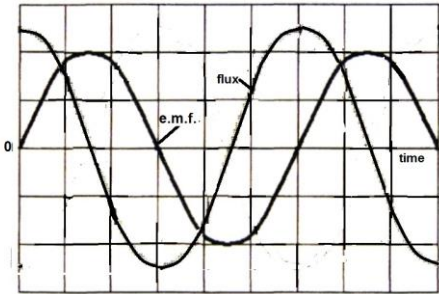
Question		Answer	Marks	Guidance
1	*(a)	Level 3 (5–6 marks) Clear description and analysis <i>There is a well-developed line of reasoning which is clear and logically structured. The information presented is relevant and substantiated.</i> Level 2 (3–4 marks) Some description and some analysis <i>There is a line of reasoning presented with some structure. The information presented is in the most-part relevant and supported by some evidence.</i> Level 1 (1–2 marks) Limited description or analysis <i>There is an attempt at a logical structure with a line of reasoning. The information is in the most part relevant.</i> 0 marks No response or no response worthy of credit.	B1 x 6	Indicative scientific points may include: Description Determine R_0 using ice water mixture or* Record V and I for various temperatures If wire is not insulated some conduction through water/use insulated wire Use small current to minimise heating effect or connect to supply for short time for readings Stir the water Wait for temperature to stabilise/bath to come to equilibrium Avoid parallax errors when reading instruments Comment about large scale increments on instruments/digital meters for precision of measurements/AW Analysis • Determine resistance from $R = V/I$ • Graph of R against θ is a straight line / Graph of R/R_0 against θ is a straight line • Correct interpretation of gradient m to find k; i.e. $k = m/R_0$ or $k = m$ • $*R_0$ by extrapolation from linear graph *descriptors D1 and A4 are alternatives

Question			Answer	Marks	Guidance
	(b)	(i)	$R = V^2/P$ or $P = V^2/R$ $R = 230^2/1000 = 52.9$ or $53(\Omega)$	C1 A1	or $P = VI$ and $R = V/I$ with $I = 4.34$ (A) This is a 'show that' question so the A1 mark is for giving both the full substitution of values and the final answer. The final answer may be to 2 or more SF.
		(ii)	number of turns, $n = 180/1.5 (= 120)$ length ($l = \pi dn$) = 3.14 (or π) $\times 0.014 \times 120 = 5.28$ (m)	C1 A1	This is a 'show that' question so the A1 mark is for giving both the full substitution of values and the final answer. The final answer may be to 2 or more SF.
		(iii)	$A = (\rho l/R) = 1.1 \times 10^{-6} \times 5.28/52.9$ $A = 0.11 \times 10^{-6} \text{ (m}^2\text{)}$ so swg = 28	M1 A1 A1	allow 53 allow solution which calculates diameter of wire using $\pi d^2/4$ rather than finding A give max 1/3 for using data from the table, i.e. finding $R = 53 \Omega$ using correct value of A or $d = 0.37$ (mm) the A marks cannot be awarded unless the M mark is awarded.
			Total	13	

Question			Answer	Marks	Guidance
2	(a)		$\omega = (2\pi f) = 2\pi \times 0.15$ or $0.3\pi (= 0.942 \text{ rad s}^{-1})$ $a_{\max} = (-\omega^2 A) = 4\pi^2 f^2 A = 0.050$ $A = 0.05/(2\pi \times 0.15)^2$ $A = 5.6 \times 10^{-2} \text{ (m)}$	C1 C1 A1	ω mark can be implicit in calculation $\omega^2 = 0.88$ or 0.89 using 0.942 or 0.94 allow 0.057 (m) ; N.B. answer is 0.053 if use ω instead of ω^2 mark as a TE max 2/3
	(b)		Maximum energy is transferred between tower (driver) and sphere when sphere (driven) is at/close to the natural frequency <u>of the tower</u> or in this forced oscillation/resonance situation	B1 B1	allow causes maximum damping <u>of the tower</u> or maximum amplitude <u>of the sphere/AW</u> allow AW e.g. sphere must be driven close to/at the natural/resonance frequency <u>of the tower</u>
	(c)	(i)	$\omega^2 = k/m$ or $(2\pi f)^2 = k/m$ or $kA = ma_{\max}$ $k = (m4\pi^2 f^2) = 6.6 \times 10^5 \times (2\pi \times 0.15)^2$ or $(k = ma_{\max}/A) = 6.6 \times 10^5 \times 0.05/0.056$ $k = 5.9 \times 10^5 \text{ (N m}^{-1}\text{)}$	C1 M1 A1	allow ω or $\omega^2 = 0.88$ or 0.89 quoted from (a) ecf value of A from (a) as this is a 'show that' question some definite evidence of working must be shown. not $k = 6 \times 10^5$ allow answer to 2 or more SF.
	(c)	(ii)	$E = \frac{1}{2}kA^2 = 0.5 \times 5.9 \times 10^5 \times 0.71^2$ $E = 1.5 \times 10^5 \text{ (J)}$	C1 A1	allow value from (c)(i) or 6; or $a = (k/m)A$, $F = ma$, $E = \frac{1}{2}FA$ accept 1.48 to 1.51 or value from ecf special case: give 1/2 for $E = 3(.0) \times 10^5 \text{ (J)}$ where it is clear that 2k has been used as the spring constant
			Total	10	

Question			Answer	Marks	Guidance
3	(a)	(i)	(For circular orbit) <u>centripetal</u> force provided by <u>gravitational</u> force (of attraction) (Gravitational / centripetal) force is along line joining stars which must therefore be diameter of circle (AW)	M1 A1	
		(ii)	$T = 20.5 \times 86400 (= 1.77 \times 10^6 \text{ s})$ and $R = 1.8 \times 10^{10} \text{ (m)}$ $m = 16 \times \pi^2 \times (1.8 \times 10^{10})^3 / G \times (20.5 \times 86400)^2$ giving $m = 4.4 \times 10^{30}$ so $m = 2.2 M_{\odot}$	C1 C1 A1	values of T and R scores first mark; both incorrect 0/3 correct substitution allowing π^2 and G $m = 16 \times 9.87 \times 1.8^3 \times 10^{30} / 6.67 \times 10^{-11} \times 1.8^2 \times 10^{12}$ using 2R gives $35.2 \times 10^{30} = 17.6 M_{\odot}$ or using T = 1 day gives $1850 \times 10^{30} = 930 M_{\odot}$ award 2/3
	(a)	(iii)	$v = 2\pi R/T = 2 \times 3.14 \times 1.8 \times 10^{10} / 1.8 \times 10^6$ (giving $v = 6.3$ or 6.4×10^4) $\Delta\lambda = (v/c)\lambda = (6.3/3) \times 10^{-4} \times 656 = 0.14 \text{ (nm)}$	C1 A1	do not penalise repeated error for R or T ecf for incorrect v, gives $\Delta\lambda = v \times 2.2 \times 10^{-6}$ $\Delta\lambda = 0.28$ for 2R; $\Delta\lambda = 2.9$ for 1 day and $\Delta\lambda = 5.7$ for both incorrect
	(b)	(i)	Two circles with centres at CoM with radii in ratio 4 : 1 CoM at surface of larger star on line joining stars	B1	allow diameter of m orbit through CoM as $44 \pm 10 \%$ for example; full reasonable circles required; ignore arrows;
	(b)	(ii)	Same period/(angular) frequency of stars but longer path for smaller star/AW or $v = 2\pi R/T$ or $v \propto R$ or stars stay at opposite ends of line through CoM	B1 B1	any arguments using $F = mv^2/r$ score zero
			Total	10	

Question			Answer	Marks	Guidance
4	(a)		(change in) KE = (change in) GPE /AW	M1	allow $mgh = \frac{1}{2}Mv^2$ as long as it is clear that m and M are different, i.e. NOT $mgh = \frac{1}{2}mv^2$ allow linear motion equation $v^2 = u^2 + 2as$ <u>and</u> $F = Ma$
			$\frac{1}{2}(m + 0.8)v^2 = 0.6 mg$ (and hence equation as shown on QP)	A1	(W =) $mg = (m + 0.8)a$; $u = 0$ and $s = 0.6$
	(b)	(i)	($v^2 =$) 4.93	B1	allow 4.9
			($\pm$) 0.22	B1	($\pm$) 0.2 (same number of decimal places)
		(ii)	Point (and error bar) plotted correctly	B1	tolerance $\pm \frac{1}{2}$ small square; possible ecf from (b)(i)
			Line of best-fit drawn through all points shown (use protractor tool at 49°)	B1	allow ecf from point plotted incorrectly or point omitted
	(c)	(i)	$v^2 = \frac{1.20mg}{(m + 0.800)}$ compared with $y = mx + c$	B1	allow minimum of gradient = $v^2/[m/(m + 0.8)] = 1.2 g$ or expect $y = v^2$ <u>and</u> $x = m/(m + 0.800)$ so gradient = 1.20g
		(ii)	one acceptable worst-fit line drawn	B1	roughly between extremes of top and bottom error bars or by eye; consequential ecfs for rest of (ii)
			large triangle used to determine gradient	B1	$\Delta x > 0.13$;
			Gradient (used to determine 'worst' g)	B1	expect steepest 12.5 ± 0.2 or shallowest 10.3 ± 0.2
			absolute uncertainty given to one decimal place	B1	if point from bii not plotted steepest line is 12.9 answer from ± 0.8 to $1.1(m s^{-2})$; allow ecf from gradient value
	(d)		card appears shorter or time measured shorter calculated speed of trolley larger gradient of graph steeper <u>or</u> $v^2 \propto g$ /AW so calculated g is greater	B1 B1 B1 B1	N.B. each B mark is consequential on the previous statement; e.g. ecf max of 3 marks for correct consequences of stating card appears longer <u>or</u> time longer
			Total	15	

Question			Answer	Marks	Guidance
5	(a)	(i)	the <u>flux</u> in the coil <u>changes/ increases/ decreases/ varies</u> (caused by the spinning/rotating magnet) causing a sinusoidal/alternating e.m.f./AW	B1 B1	or e.m.f. is proportional to /equals rate of change of flux linkage/linking the coil or qualification, e.g. magnet vertical gives minimum flux through core or maximum rate of change of flux or vice versa with magnet horizontal or maximum flux is when emf is zero or minimum flux is when emf is maximum or vice versa
		(ii)		B1	allow $\pm \cos$ wave of correct period, constant amplitude at least one cycle N.B. quality: curve must look like a reasonable sine wave as one is present on the page to copy
		(iii)	$\phi = BA = V/2\pi fN = 1.2/(2 \times \pi \times 24 \times 150)$ $\phi = 5.3 \times 10^{-5}$ $\text{Wb} / \text{T m}^2$	B1 B1	allow no other unit combinations; NOT T m^{-2}
	(b)		see page 9	B1 x 6	
Total				11	

Question	Answer	Marks	Guidance
5	Level 3 (5–6 marks) Clear description, some measurements and full analysis <i>There is a well-developed line of reasoning which is clear and logically structured. The information presented is relevant and substantiated.</i> Level 2 (3–4 marks) Some description, some measurements and some analysis. <i>There is a line of reasoning presented with some structure. The information presented is in the most-part relevant and supported by some evidence.</i> Level 1 (1–2 marks) Limited description and/or limited measurements and/or limited analysis <i>There is an attempt at a logical structure with a line of reasoning. The information is in the most part relevant.</i> 0 marks No response or no response worthy of credit.	B1 x 6	Indicative scientific points may include: Description - Signal generator/a.c. supply connected to coil X - Coil Y connected to voltmeter / oscilloscope (can be on diagram) - Use oscilloscope to determine period / frequency or read off signal generator - Adjust signal generator / use of rheostat to keep current constant in coil X Measurements - Vary f and measure V - Keep <u>current</u> in coil X <u>constant</u> - Detail on how to measure e.m.f. e.g. 'height x y-gain' - Detail on how to measure period on oscilloscope screen using time base and hence f Analysis - Determine f from period measurement, $f = 1/T$ - Plot a graph of V against f - Relationship valid if straight line through the origin

Question			Answer	Marks	Guidance
6	(a)	(i)	$\sin C = 1/n = 1/1.69 (= 0.592)$ $C = 36^\circ$	C1 A1	
		(ii)	<u>Total internal reflection</u> occurs because the <u>angle of incidence</u> (at the surface) is greater than the <u>critical angle/ 36°</u>	B1 B1	allow because <u>$i > C$</u>
	(b)		$E = (hc/\lambda) = 6.63 \times 10^{-34} \times 3.0 \times 10^8 / 450 \times 10^{-9}$ $E = 4.42 \times 10^{-19} \text{ (J)}$ energy = 2.76 (eV)	C1 C1 A1	N.B. the answer here must be 2 SF or more
	(c)	(i)	$2.76 - 2.3 = 0.46 \text{ eV}$ (so only 0.5% of energy/AW)	B1	allow $2.8 - 2.3 = 0.5 \text{ eV}$ and $3.0 - 2.3 = 0.7 \text{ eV}$ possible ecf from (b)
		(ii)	$n = 2000 \times 4^9 (= 5.24 \times 10^8)$ $Q = ne = 8.4 \times 10^{-11} \text{ (C)}$ $I = 8.4 \times 10^{-11} / 2.5 \times 10^{-9}$ average current = 0.034 (A)	C1 C1 A1	allow ecf for wrong n allow 34 m(A); answer is $1.7 \times 10^{-5} \text{ A}$ if 2000 omitted (2/3)
			Total	11	

OCR (Oxford Cambridge and RSA Examinations)
The Triangle Building
Shaftesbury Road
Cambridge
CB2 8EA

OCR Customer Contact Centre

Education and Learning

Telephone: 01223 553998

Facsimile: 01223 552627

Email: general.qualifications@ocr.org.uk

www.ocr.org.uk

For staff training purposes and as part of our quality assurance programme your call may be recorded or monitored

Oxford Cambridge and RSA Examinations
is a Company Limited by Guarantee
Registered in England
Registered Office; The Triangle Building, Shaftesbury Road, Cambridge, CB2 8EA
Registered Company Number: 3484466
OCR is an exempt Charity

OCR (Oxford Cambridge and RSA Examinations)
Head office
Telephone: 01223 552552
Facsimile: 01223 552553

© OCR 2018

