GCE AS MARKING SCHEME

SUMMER 2023

AS
FURTHER MATHEMATICS
UNIT 3 FURTHER MECHANICS A
2305U30-1

© WJEC CBAC Ltd.

INTRODUCTION

This marking scheme was used by WJEC for the 2023 examination. It was finalised after detailed discussion at examiners' conferences by all the examiners involved in the assessment. The conference was held shortly after the paper was taken so that reference could be made to the full range of candidates' responses, with photocopied scripts forming the basis of discussion. The aim of the conference was to ensure that the marking scheme was interpreted and applied in the same way by all examiners.

It is hoped that this information will be of assistance to centres but it is recognised at the same time that, without the benefit of participation in the examiners' conference, teachers may have different views on certain matters of detail or interpretation.


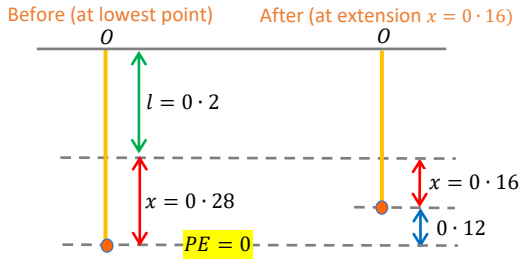
WJEC regrets that it cannot enter into any discussion or correspondence about this marking scheme.

© WJEC CBAC Ltd.

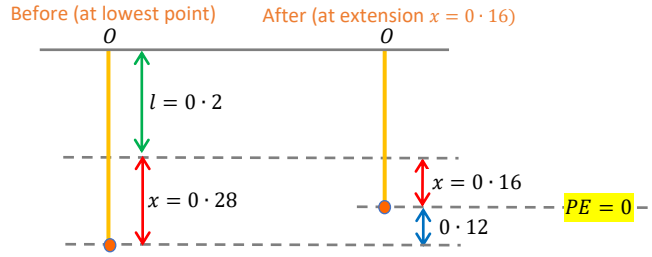
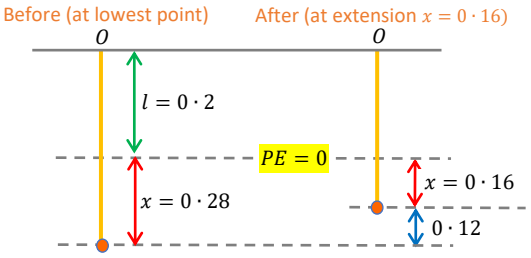
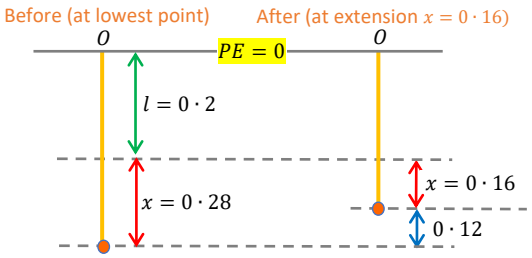
WJEC GCE AS FURTHER MATHEMATICS

UNIT 3 FURTHER MECHANICS A

SUMMER 2023 MARK SCHEME

Q1	Solution	Mark	Notes
(a)	Use of Hooke's Law $T = \frac{5gx}{0{\cdot}2}$ $4g = \frac{5gx}{0{\cdot}2}$ $x = 0{\cdot}16$ (m)  	M1 A1 **[2]**	Used, $T = \frac{\lambda x}{l}$ $\lambda = 5g = 49$ $\quad 4g = 39{\cdot}2$ Convincing
(b)	 Using expression for $\text{EE} = \frac{\lambda x^2}{2l}$ $\text{EE} = \begin{cases} \frac{5g(0{\cdot}28^2 - 0{\cdot}16^2)}{2(0{\cdot}2)} = 6{\cdot}468 = 0{\cdot}66g \\ \frac{5g(0{\cdot}28)^2}{2(0{\cdot}2)} = 9{\cdot}604 = 0{\cdot}98g \\ \frac{5g(0{\cdot}16)^2}{2(0{\cdot}2)} = 3{\cdot}136 = 0{\cdot}32g \end{cases}$ Using expression for $\text{PE} = mgh$ $\text{PE} = \begin{cases} 4g(0{\cdot}28 - 0{\cdot}16) = 4{\cdot}704 = 0{\cdot}48g \\ 4g(0{\cdot}28) = 10{\cdot}976 = 1{\cdot}12g \\ 4g(0{\cdot}16) = 6{\cdot}272 = 0{\cdot}64g \\ 4g(0{\cdot}48) = 18{\cdot}816 = 1{\cdot}92g \\ 4g(0{\cdot}36) = 14{\cdot}112 = 1{\cdot}44g \end{cases}$ $\text{KE} = \frac{1}{2}(4)v^2$ Conservation of Energy (before = after) $\frac{5g(0{\cdot}28)^2}{2(0{\cdot}2)} = \frac{1}{2}(4)v^2 + \frac{5g(0{\cdot}16)^2}{2(0{\cdot}2)} + 4g(0{\cdot}12)$ $9{\cdot}604 = 2v^2 + 3{\cdot}136 + 4{\cdot}704$ $v^2 = 0{\cdot}882 \quad (= 0{\cdot}09g)$ $v = 0{\cdot}9(391\ldots)$ (ms^{-1})	M1 A1 M1 A1 B1 M1 A1 A1 **[8]**	 A correct expression A correct expression KE, EE and PE all present All correct, oe (see further notes) Note $v = \frac{21\sqrt{5}}{50}$ or $v = 0{\cdot}3\sqrt{g}$
	Total for Question 1	**10**	



© WJEC CBAC Ltd.

Further Notes	
(b)	<u>Alternative Solution for Conservation of Energy A1</u> KE = loss in EE - gain in PE $\frac{1}{2}(4)v^2 = \frac{5g(0{\cdot}28^2 - 0{\cdot}16^2)}{2(0{\cdot}2)} - 4g(0\cdot 28 - 0\cdot 16)$ A1 $2v^2 = 6\cdot 468 - 4\cdot 704$ $\left(2v^2 = \frac{33}{50}g - \frac{12}{25}g \quad \text{or} \quad 2v^2 = 0\cdot 64g - 0\cdot 48g\right)$
(b)	<u>Alternative PE reference points</u>  $\frac{5g(0{\cdot}28)^2}{2(0{\cdot}2)} - 4g(0\cdot 12) = \frac{1}{2}(4)v^2 + \frac{5g(0{\cdot}16)^2}{2(0{\cdot}2)}$ A1 $9\cdot 604 - 4\cdot 704 = 2v^2 + 3\cdot 136$
(b)	<u>Alternative PE reference points</u>  $\frac{5g(0{\cdot}28)^2}{2(0{\cdot}2)} - 4g(0\cdot 28) = \frac{1}{2}(4)v^2 + \frac{5g(0{\cdot}16)^2}{2(0{\cdot}2)} - 4g(0\cdot 16)$ A1 $9\cdot 604 - 10\cdot 976 = 2v^2 + 3\cdot 136 - 6\cdot 272$
(b)	 $\frac{5g(0{\cdot}28)^2}{2(0{\cdot}2)} - 4g(0\cdot 48) = \frac{1}{2}(4)v^2 + \frac{5g(0{\cdot}16)^2}{2(0{\cdot}2)} - 4g(0\cdot 36)$ A1 $9\cdot 604 - 18\cdot 816 = 2v^2 + 3\cdot 136 - 14\cdot 112$

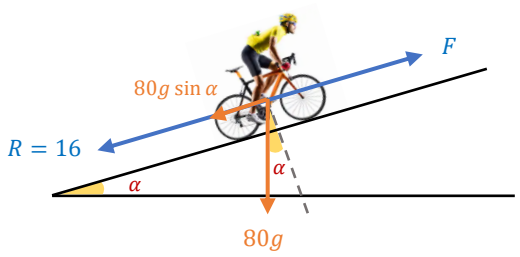
© WJEC CBAC Ltd.

Q2	Solution	Mark	Notes
(a)	$\mathbf{r}_A = \begin{cases} 6\mathbf{i}+21\mathbf{j}-8\mathbf{k}+(3\mathbf{i}-\mathbf{j}+4\mathbf{k})t \\ \begin{pmatrix}6+3t\\21-t\\4t-8\end{pmatrix} \\ (6+3t)\mathbf{i}+(21-t)\mathbf{j}+(4t-8)\mathbf{k} \end{cases}$	B1	
	At $t=5$, $\mathbf{r}_A = 21\mathbf{i}+16\mathbf{j}+12\mathbf{k}$	M1	Use of $t=5$
	$\lvert\mathbf{r}_A\rvert = \sqrt{21^2+16^2+12^2}$	m1	Attempt to find $\lvert\mathbf{r}_A\rvert$
	$\lvert\mathbf{r}_A\rvert = \sqrt{841} = 29$ (m)	A1 **[4]**	cao
(b)	(i) $\mathbf{v} = \frac{\mathrm{d}\mathbf{r}}{\mathrm{d}t}$	M1	
	$\mathbf{v_B} = \frac{3}{2}\cos\left(\frac{t}{2}\right)\mathbf{i}+\frac{3}{2}\sin\left(\frac{t}{2}\right)\mathbf{j}$	A1	
	$\lvert\mathbf{v}_B\rvert = \sqrt{\left(\frac{3}{2}\cos\left(\frac{t}{2}\right)\right)^2+\left(\frac{3}{2}\sin\left(\frac{t}{2}\right)\right)^2}$	m1	FT their $\mathbf{v_B}$ throughout
	$\lvert\mathbf{v}_B\rvert = \sqrt{\frac{9}{4}} = \frac{3}{2} = 1\cdot5$ (ms^{-1}) which is constant.	A1	cao
	(ii) Dot product, $\mathbf{v_A}.\mathbf{v_B} = 0$	M1	
	$(3\mathbf{i}-\mathbf{j}+4\mathbf{k})\cdot\left(\frac{3}{2}\cos\left(\frac{t}{2}\right)\mathbf{i}+\frac{3}{2}\sin\left(\frac{t}{2}\right)\mathbf{j}\right) = 0$		
	$\frac{9}{2}\cos\left(\frac{t}{2}\right)-\frac{3}{2}\sin\left(\frac{t}{2}\right) = 0$	m1	
	$\tan\left(\frac{t}{2}\right) = 3$		
	$t = 2\cdot4(9809\ldots)$ (s)	A1 **[7]**	cao
	Total for Question 2	**11**	

© WJEC CBAC Ltd.

Q3	Solution	Mark	Notes
(a)			$\sin\theta = \frac{5}{13}$ $\cos\theta = \frac{12}{13}$ 
	Resolve vertically $R\sin\theta = Mg$	M1 A1	Dimensionally correct
	$\sin\theta = \frac{5}{13}$	B1	si
	$R = Mg \times \frac{13}{5}$		
	$R = \frac{13Mg}{5}$	A1	Convincing
		[4]	
(b)	N2L towards centre $R\cos\theta = Ma$	M1 A1	Dimensionally correct
	$\frac{13Mg}{5} \times \frac{12}{13} = M\frac{(3\sqrt{g})^2}{r}$	m1	$a = \frac{v^2}{r}$
	$CP = r = \frac{15}{4}$ $(= 3 \cdot 75\ \text{m})$	A1	
	$\frac{r}{CV} = \frac{5}{12}$ $(= \tan\theta)$	M1	oe, similar triangles
	$CV = 9$ (m)	A1	cao
		[6]	
	Total for Question 3	**10**	

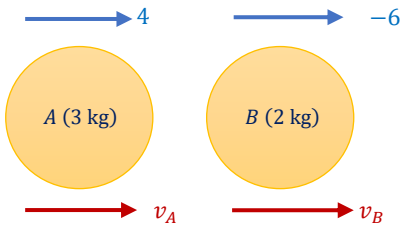
© WJEC CBAC Ltd.

Q4	Solution	Mark	Notes
(a)	(i) Work-energy principle $16 \times d = 1440\ (000)$ $d = 90\ (000)$ $\quad (\text{km}\ (\text{m}))$	M1 A1	Used, $F \times d = E$ cao, oe
	(ii) Using expression for PE **or** KE	M1	
	At end, $\text{KE} = \frac{1}{2}(80)(10)^2 \quad = 4000$	A1	$= 4000\ \text{J} = 4\ \text{kJ}$
	$\text{PE} = 80gh = \begin{cases} 11200g = 109760 & \text{for} \quad h = 140 \\ 12000g = 117600 & \text{for} \quad h = 150 \\ 800g = 7840 & \text{for} \quad h = 10 \end{cases}$	A1	
	Work-energy principle (See notes)	M1	All terms included, oe FT their KE and PE
	$WD = 1440\ 000 + 4000 + 109760$	A1	
	$(WD = 1440\ 000 + 4000 + 11200g)$		
	$WD = 1\ 553\ 760 \quad (\text{J}) \qquad (= 1553 \cdot 760\ \text{kJ})$	A1 **[8]**	cao
(b)			$\sin \alpha = \frac{2}{7}$
	$F = \frac{250}{v}$ $\qquad$ (maximum force)	B1	si
	Using N2L up plane with $a = 0$ $F - R - mg \sin \alpha = 0$	M1 A1	All forces, dim. correct Correct equation
	$F - 16 - 80g\left(\frac{2}{7}\right) = 0 \qquad F - 240 = 0$	A1	$\frac{250}{v} - 16 - 80g\left(\frac{2}{7}\right) = 0$
	$v = \frac{25}{24} = 1 \cdot 04(166 \ldots) \quad (\text{ms}^{-1})$ (max. speed)	A1 **[5]**	cao
	Total for Question 4	**13**	

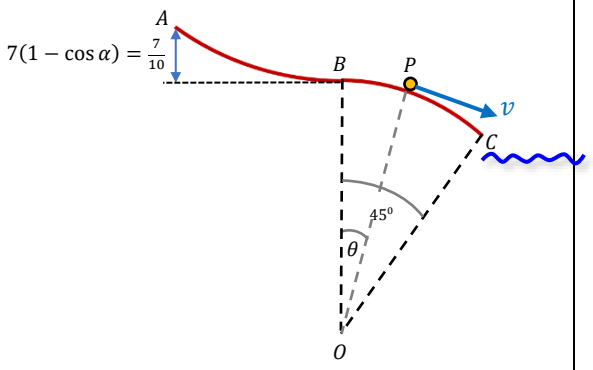
© WJEC CBAC Ltd.

Further Notes	
(a) (ii)	<u>Alternative Solution(s) for Work-energy principle</u> • Energy at Start (PE) + WD by cyclist = WD against resistances + Energy at end (PE+KE) $7840 + \text{WD} = 1440\,000 + 117600 + 4000$ $(800g + \text{WD} = 1440\,000 + 12000g + 4000)$ • WD by cyclist = WD against resistances + Energy at end (gain in PE+KE) $\text{WD} = 1440\,000 + 109760 + 4000$ $(\text{WD} = 1440\,000 + 11200g + 4000)$

© WJEC CBAC Ltd.

Q5	Solution	Mark	Notes
(a)	Impulse $= m_B v_B - m_B u_B$ (change in momentum) $= 2(-6-10)$ $\lvert\text{Impulse}\rvert = 32 \quad (\text{Ns})$ **Opposite** direction to original motion	M1 A1 A1 **[3]**	Used
(b)	 Conservation of momentum $(4)(3)+(-6)(2) = 3v_A + 2v_B$ $3v_A + 2v_B = 0 \qquad (v_A = -\frac{2}{3}v_B)$ Loss in Kinetic energy $\frac{1}{2}(3)(4)^2 + \frac{1}{2}(2)(-6)^2 - \frac{1}{2}(3){v_A}^2 - \frac{1}{2}(2){v_B}^2 = 45$ $60 - \frac{3}{2}{v_A}^2 - {v_B}^2 = 45$ $3{v_A}^2 + 2{v_B}^2 = 30$ $3\left(\frac{-2v_B}{3}\right)^2 + 2{v_B}^2 = 30$ $v_B = \pm 3 \qquad$ or $\qquad v_A = \pm 2$ $v_A = -\frac{2}{3}(\pm 3) = \mp 2 \qquad v_B = -\frac{3}{2}(\pm 2) = \mp 3$ $(v_A, v_B) = (\mathbf{2}, \mathbf{-3})$ or $(\mathbf{-2}, \mathbf{3})$ speed $v_A = 2 \quad (\text{ms}^{-1})$ speed $v_B = 3 \quad (\text{ms}^{-1})$ Both objects are moving in the opposite direction to their original motion.	 M1 A1 M1 A1 m1 m1 A1 A1 **[8]**	 Attempted All correct Attempted. Before = 60 After = $\frac{3}{2}{v_A}^2 + {v_B}^2$ One variable eliminated. cao
	Total for Question 5	**11**	

© WJEC CBAC Ltd.

Q6	Solution	Mark	Notes
(a)			
	(i) Conservation of energy ($PE = 0$ along horizontal through O) $mg\big(5+7(1-\cos\alpha)\big)=\frac{1}{2}mv^2+mg(5\cos\theta)$ $5\cdot 7g=0\cdot 5v^2+5g\cos\theta$ $55\cdot 86=0\cdot 5v^2+49\cos\theta$ $2793=25v^2+2450\cos\theta$ $285g=25v^2+250g\cos\theta$ $v^2=111\cdot 72-98\cos\theta$ $(=11\cdot 4g-10g\cos\theta)$	M1 A1 A1 A1 **[4]**	KE and PE in dim. correct equation KE PE Convincing
	Alternative solution ($PE = 0$ along horizontal through B) (i) Conservation of energy $mg\big(7(1-\cos\alpha)\big)=\frac{1}{2}mv^2-mg\big(5(1-\cos\theta)\big)$ $0\cdot 7g=0\cdot 5v^2-5g+5g\cos\theta$ $6\cdot 86=0\cdot 5v^2-49+49\cos\theta$ $343=25v^2-2450+2450\cos\theta$ $v^2=111\cdot 72-98\cos\theta$ $(=11\cdot 4g-10g\cos\theta)$	(M1) (A1) (A1) (A1) **([4])**	KE and PE in dim. correct equation KE PE Convincing
	(ii) N2L towards O $50g\cos\theta-R=\frac{50v^2}{5}$ $R=50g\cos\theta-\frac{50}{5}(111\cdot 72-98\cos\theta)$ $R=\begin{cases}1470\cos\theta-1117\cdot 2\\150g\cos\theta-114g\end{cases}$	M1 A1 m1 A1 **[4]**	Dim. correct equation $50g\cos\theta$, R opposing Substitute for v^2 (any form)

© WJEC CBAC Ltd.

	(iii) Loses contact when $R = 0$ $1470\cos\theta - 1117 \cdot 2 = 0$ $\cos\theta = \frac{114}{150}$ $\left(= \frac{1117 \cdot 2}{1470} = \frac{19}{25}\right)$ $\theta = 40 \cdot 5(358\ldots)^\circ$ $\theta = 40 \cdot 5(358\ldots)^\circ < 45^\circ$ $\therefore$ ring loses contact before reaching C	M1 A1 A1 **[3]**	Used. FT R from (ii) or $150g\cos\theta - 114g = 0$ Accept 41 FT R from (ii) FT R provided $\theta < 45^\circ$
	Alternative Solution (iii) Sub. $\theta = 45^\circ$ into expression for R $R = -77.7(530\ldots)$ $R = -77.7(530\ldots) < 0$ $\therefore$ ring loses contact before reaching C	 (M1) (A1) (A1) **([3])**	 FT R from (ii) FT R FT provided $R < 0$
	(iv) Rubber ring may lose contact at a greater value of θ or Rubber ring may remain in contact until C.	E1 **[1]**	
(b)	N2L towards D At $A, \cos\alpha = 0 \cdot 9$: $R_A - 50g(0 \cdot 9) = 50a$ $R_A = 50a + 45g > 45g = 441$ At $B, \cos\alpha = 1$: $R_B - 50g = 50a$ $R_B = 50a + 50g > 50g = 490$ $R_B > R_A > 0$ so must remain in contact	M1 A1 A1 **[3]**	Dim. correct equation Any correct equation including $R' - 50g\cos\alpha = 50a$ $a = \frac{v^2}{r} > 0$ Convincing
	Total for Question 6	**15**	

© WJEC CBAC Ltd.